



# innowater



## SALT WATER CHLORINATION IN YOUR SWIMMING POOL

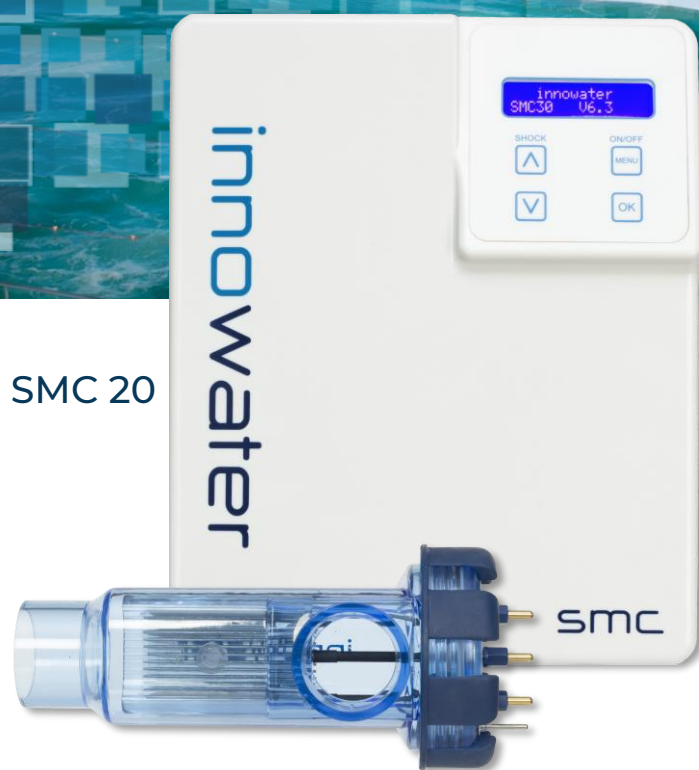

SMC 20

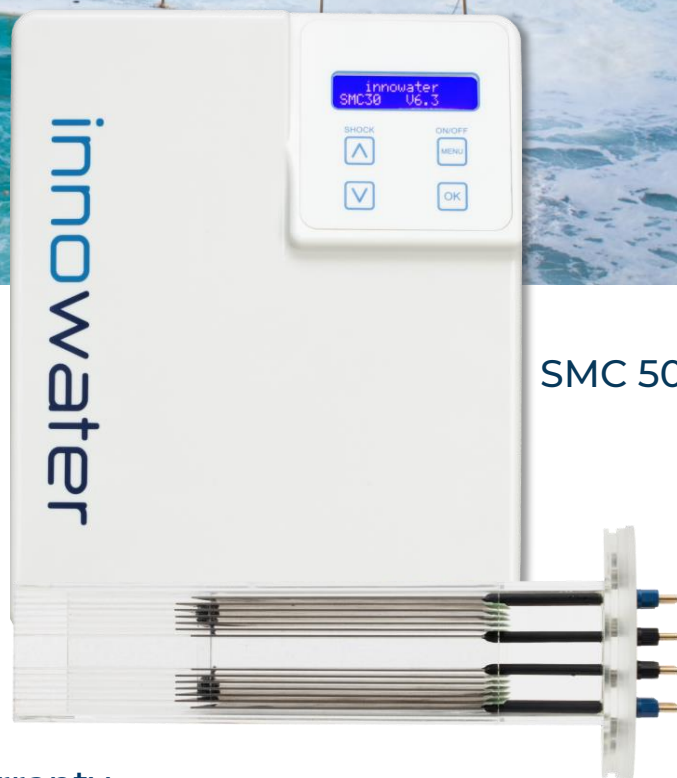


SMC 50

3 years warranty

## SALT WATER CHLORINATOR SMC

- ✓ Sealed high performance power supply.
- ✓ Closed enclosure without force ventilation.
- ✓ LCD display with easy menu interface.
- ✓ Fast-disconnect water proof cell connector.
- ✓ Power electronic control overload proof.
- ✓ Low maintenance compact bipolar cell.
- ✓ Programmable polarity period.
- ✓ Transparent cell housing for easy access and rapid inspection.
- ✓ Screwless cell cable connection.
- ✓ Metal-plastic removable cell pins.

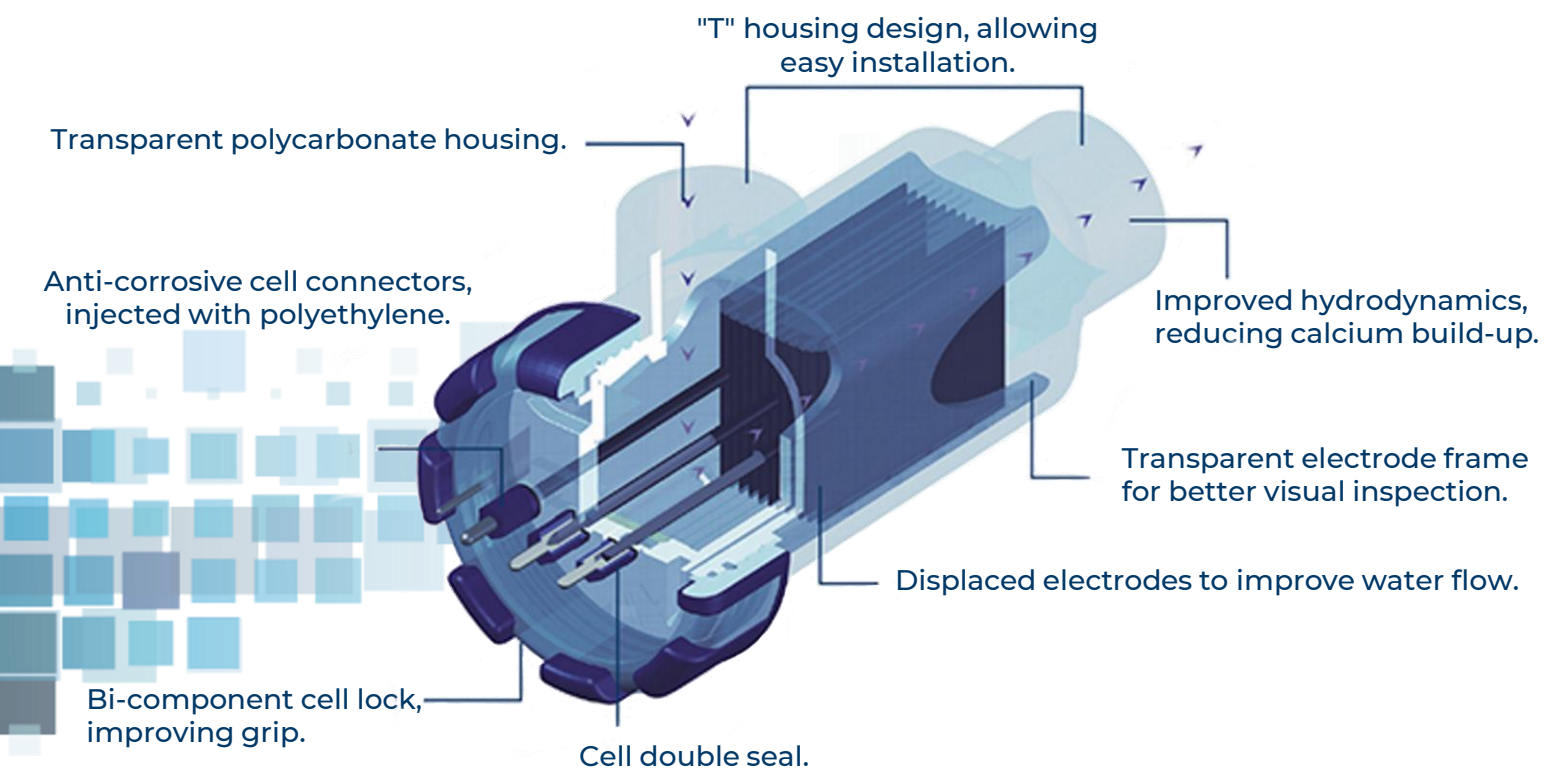

MODEL	SMC 10	SMC 15	SMC 20	SMC 30	SMC 50
Chlorine production (gr/h)	10	20	20	30	50
m <sup>3</sup> máx. pool T < 25° C	30	50	90	150	200
m <sup>3</sup> máx. pool T > 25° C	20	40	75	120	160
Max. output voltaje (VDC)	24	24	24	24	24
Max. output current (A)	1,5	2,5	3,0	5,0	8,5
Power supply (VAC)	230	230	230	230	230
Max. Input power (W)	50	60	90	130	210
Cell reversal polarity	Programable	Programable	Programable	Programable	Programable
Output power control	Electrónico	Electrónico	Electrónico	Electrónico	Electrónico
Salt concentration (gr/l)	4 – sea water	4 – sea water	4 – sea water	4 – sea water	4 – sea water
Electrode quality	DN240 10K	DN240 10K	DN240 10K	DN240 10K	DN240 10K
Min. Flow (m <sup>3</sup> /h)	4	4	4	6	10
Max. pressure (bar)	1,5	1,5	1,5	1,5	1,5
Pressure drop (bar)	0,025	0,025	0,025	0,025	0,030
Cell tube (mm)	50	50	50	50	63
Cell installation	PVC glue	PVC glue	PVC glue	PVC glue	PVC glue
Weight (kg)	4,5	4,5	4,5	5	13
Packaging dimensions (mm)	600 x 350 x 150	600 x 350 x 150	600 x 350 x 150	600 x 350 x 150	645 x 640 x 220